

# MODEL 150

## TOUGHTRAK – STANDARD DUTY LOW PROFILE CONVEYOR

Toughtrak tough and durable conveyors are built to survive the extreme tests of the manufacturing environment. Its low profile, 1.75" frame depth will fit into or under tight spaces. Toughtrak conveyors are built to work harder and last longer than any conveyor in its class.

**Widths:** Up to 24"

**Lengths:** End drives- 3' to 10' long

Center drive- 3' to 20'6"

**Standard Motor:** (Gear motors)

1/6 HP 115/1/60 @ 28 & 57 FPM

1/6 HP 208-230/460/3/60 @ 29 & 58 FPM

1/6 HP 90 Volt DC @ 30 & 59 FPM

**Standard Drive:** End Drive, Shaft Mount Right


Angle Infeed Facing on Right/Left Side

**Standard Belt:** Black 2 Ply PVC x Bare Back


**Drive/Infeed Pulley:** 1 5/16" Dia Crown Face Knurled

**Frame:** 1.75" x 12 Gauge

**Bearings:** Precision at Drive/Infeed

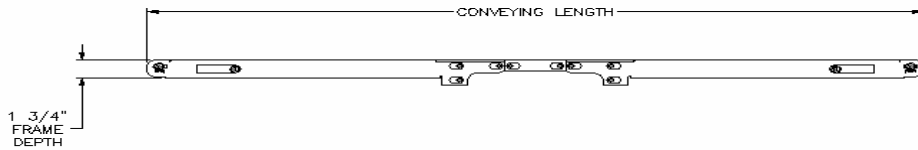

Center Drive

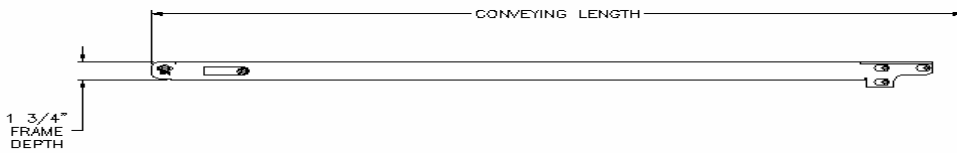

End Drive