

1700 Division Street, New London, WI 54961

MODEL 180

DIRECTIONAL CHANGE TURNTABLE

Phone: (920) 982-4030; Fax: (920) 982-6800

Website: www..nleco.com

This turntable is used in curve applications where space is limited. Typically used in sorting applications and systems with a 180 degree turn. These units can turn products 180 degrees in spaces traditional units can't.

Standard Table Diameters: 3' to 8' **Standard Siderails:** 3 ½" Vertical Stationary

Standard Speed: 2.5 Revolutions per minute **Bearings:** Grease Sealed


Standard Motor: ½ HP 230/460/3/60 TEFC Standard Supports: 30" Elevation Top of Belt

Standard Drive: Bottom mounted under table: **Standard Frame:** 12 Gauge Carbon Steel with a 2" edge

Chain Driven Direct Drive Carrier Platform: 1/4" steel plate rotates on heavy duty

casters

Infeed: Gravity Roller or Skate Wheel Approaches

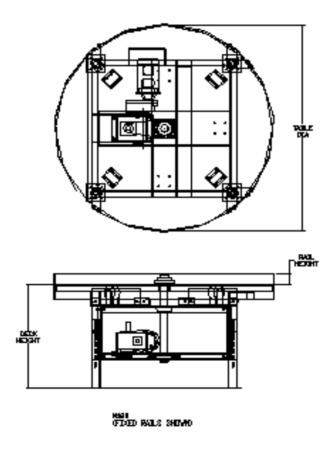

MODEL 180