

# MODEL 250

## TOUGHTRAK – HEAVY DUTY LOW PROFILE CONVEYOR

Toughtrak tough and durable conveyors are built to survive the extreme tests of the manufacturing environment. Its low profile, 1.75” frame depth will fit into or under tight spaces. Toughtrak conveyors are built to work harder and last longer than any conveyor in its class.

**Widths:** Up to 24”

**Lengths:** Up to 20’6”, One Piece Frame

**Standard Motor:**

1/3 HP 115/1/60 @ 30 & 60 FPM

1/3 HP 208-230/460/3/60 @ 30 & 60 FPM

1/3 HP 90 Volt DC @ 30 & 60 FPM

**Standard Drive:** End Drive, Bottom Mount Right

Angle Infeed Facing on Right/Left Side


**Standard Belt:** Black 2 Ply PVC x Bare Back

**Drive Pulley:** 2 7/8” Diameter Crown Face Knurled


**Infeed Pulley:** 1.315” Diameter Flat Face

**Frame:** 1.75” x 12 Gauge

**Bearings:** Precision at Infeed & Snub; Grease Sealed at Drive

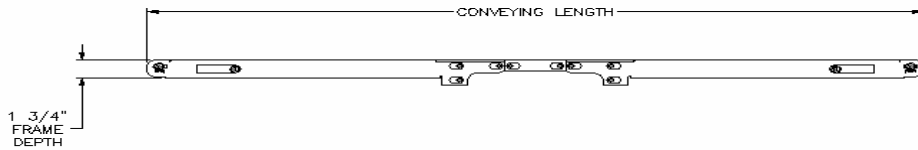

Center Drive

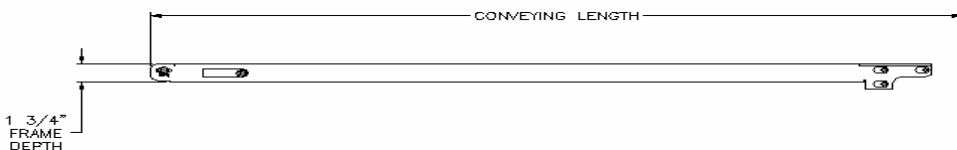

End Drive